

# TOTO®

Perfection by Design

## CST 704 1.6 GPF Toilet, Elongated



**CST 704 - 1.6 Gpf Toilet**  
**SS114 - SoftClose Toilet Seat**

*Colors:*  
Standard #01 Cotton  
Optional See price book for additional colors

*Trip Lever:*  
Standard Color Matched  
Optional See price book for additional finishes



**ST 703**

- Ultra low 1.6 Gpf flush
- Powerful flushing design
- Large water surface

Two piece vitreous china elongated front gravity feed 1.6 Gpf toilet, complete. Includes tank fittings and bolt caps, less seat.

Tank fittings included, complete with flush valve, ballcock, and color matched trip lever assembly.

- **CST704**  
Elongated, 12" rough-in.
- **CST704.10**  
Elongated, 10" rough-in.

- **C704**  
Elongated front bowl only, 12" rough-in.

- **C704.10**  
Elongated front bowl only, 10" rough-in.

- **ST703**  
Tank and cover, complete with tank and trim coupling components.

- **ST703R**  
Tank and cover, complete with tank and trim coupling components with right hand trip lever.

- **SS114**  
SoftClose: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

- **SC134**  
Elongated, open front seat with lid.

- **SC534**  
Elongated, open front seat less lid.

# CST 704

## 1.6 GPF Toilet, Elongated

### ■ PERFORMANCE

The TOTO 1.6 Gpf toilet received high ratings in independent laboratory performance tests. With a powerful and quiet flush design, the toilet also offers a large water surface.

### ■ SPECIFICATIONS

Water Use: 1.6 Gpf/6.0 Lpf  
 Flush System: Gravity Feed  
 Min. Water Pressure: 8 psi  
 Water Surface: 9-1/2" x 8-1/4"  
 Trap Diameter: 1-7/8"  
 Rough-in: **C704** – 12" rough-in  
**C704.10** – 10" rough-in  
 Trap Seal: 2-1/4"  
 Warranty: One Year Limited Warranty  
 Material: Two piece vitreous china bowl and tank

Shipping Weight: **C704–Bowl**  
 49.0 lbs.  
**C704.10–Bowl**  
 48.0 lbs.  
**ST703 / ST703R / ST703B–Tank**  
 32.0 lbs.


Shipping Dimensions: **C704 / C704.10–Bowl**  
 28-1/8"L x 9-7/8"W<sup>1</sup>  
 x 16-1/2"W<sup>2</sup> x 15-3/4"H

**ST703 / ST703R / ST703B–Tank**  
 18-1/8"L x 8-1/4"W  
 x 15-1/2"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.

Listing / Approvals: IAPMO/UPC, CSA, City of Los Angeles, State of Massachusetts, and others.

These dimensions and specifications are subject to change without notice.

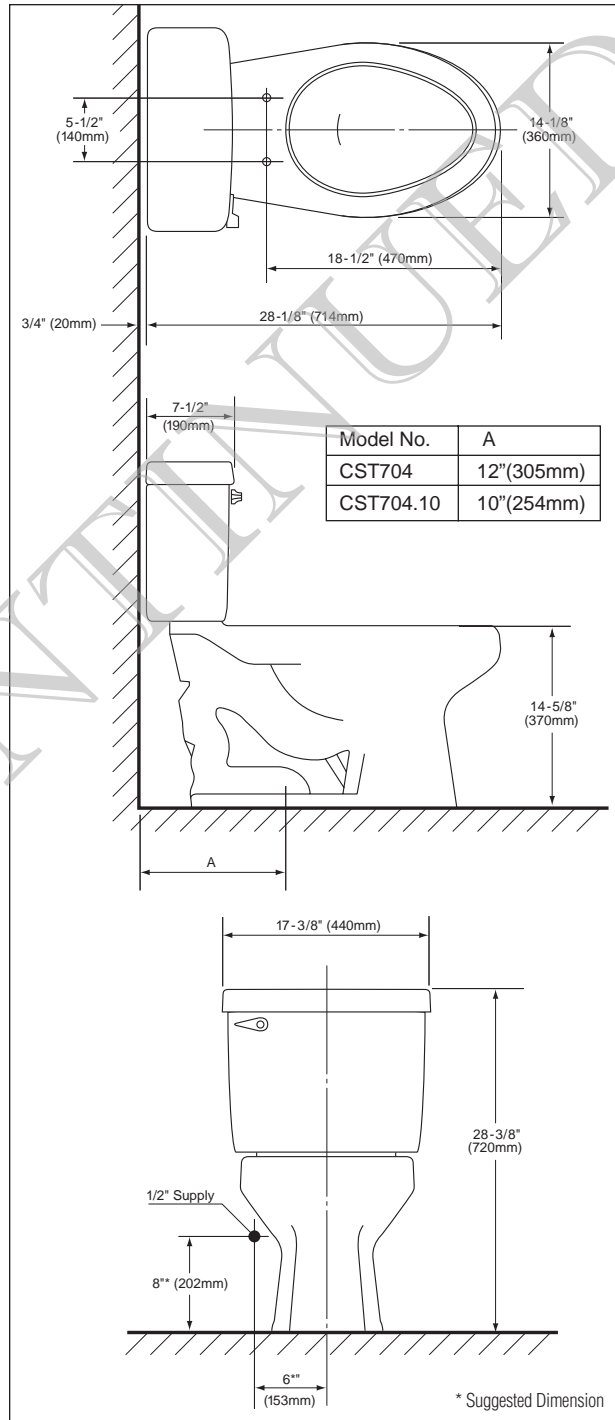

CST 704