

## Maris® Close Coupled Toilet, 1.28GPF & 0.9GPF

### FEATURES

- 3D Tornado™ flushing system, high efficiency (1.28GPF/4.8LPF & 0.9GPF/3.4LPF)
- Elongated bowl
- Universal Height
- Close coupled, elongated front bowl and tank set, less toilet seat
- CEFIONTECT® ceramic glaze - CEFIONTECT glaze prevents debris, and mold from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning.
- Chrome trip-lever
- 12" Rough-in

### MODELS

- CST484CEMFG  
With CEFIONTECT ceramic glaze

### COMPONENTS

- CT484CEFG - Elongated Front Bowl w/ CEFIONTECT
- ST484M - Tank and cover only
- SS114 SoftClose® seat (sold separately)
- THU9090R Washlet® Adapter Hose Kit (Required for Washlet installation)

### COLORS/FINISHES

- Standard  
#01 Cotton

### PRODUCT SPECIFICATION

The two-piece, universal height, high efficiency 3D Tornado flushing system toilet shall be 1.28GPF/0.9GPF. Toilet shall be ADA height compliant and universal height. Toilet shall have high-profile tank, elongated front bowl and chrome trip-lever. Toilet shall be TOTO Model CST484CEMF\_\_\_\_\_.



 **Tornado Flush**

 **CEFIONTECT**

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



# CST484CEMFG


## Maris® Close Coupled Toilet, 1.28GPF & 0.9GPF

### SPECIFICATIONS


- Water Use 1.28 GPF & 0.9GPF (4.8LPF & 3.4LPF)
- Flush System 3D Tornado™
- Min. Water Pressure 8 psi (flowing)
- Water Surface 5-1/2" x 4-3/16"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-1/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight C484CEFG - 89lbs  
ST484M - 39lbs
- Shipping Dimensions C484CEFG  
29-1/2" L x 16-3/8" W x 18" H  
  
ST484M  
21" L x 9-3/8" W x 17-7/8" H

### INSTALLATION NOTES

Back-to-Back Toilet Installations:  
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

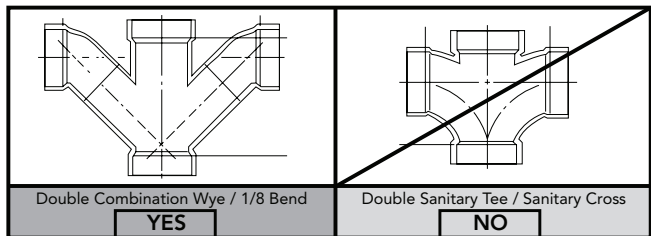

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

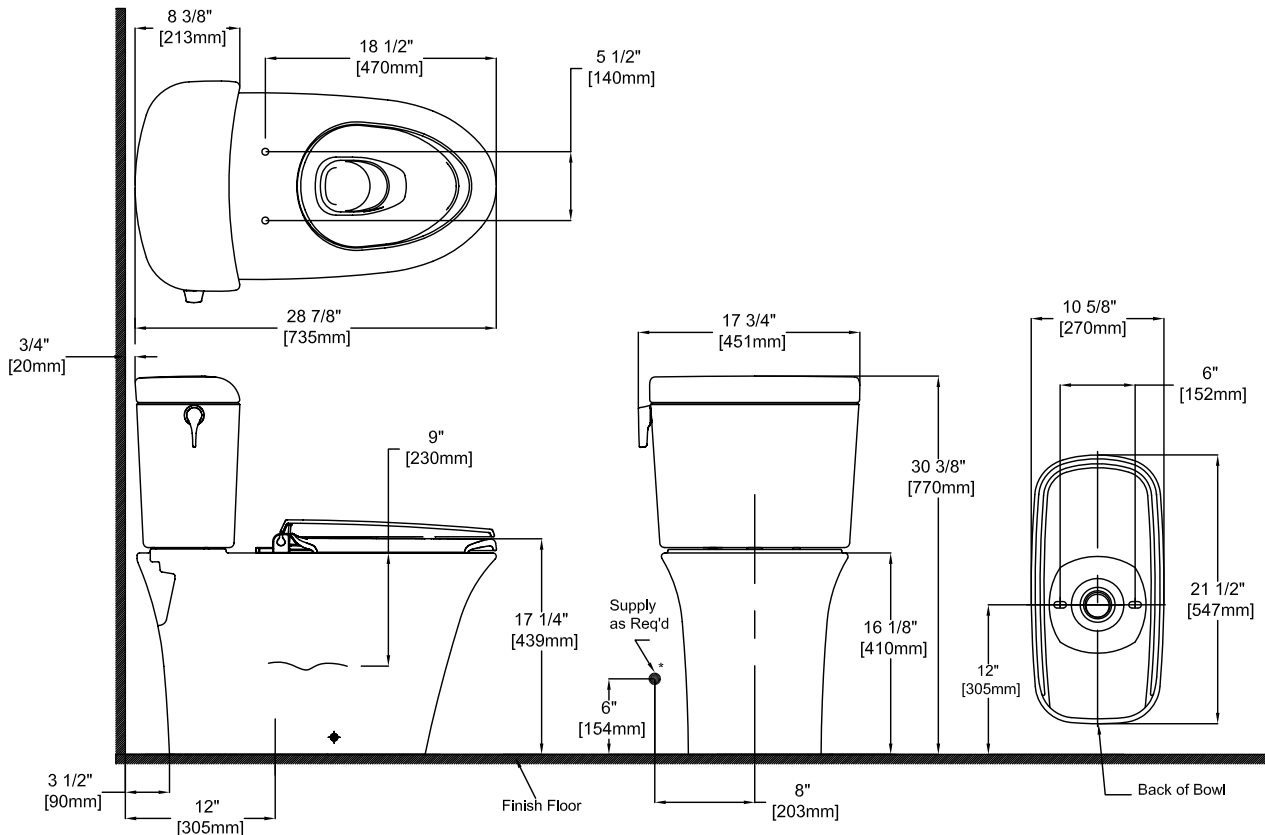

\*Suggested Dimensions

**TOTO**

These dimensions and specifications are subject to change without notice